


NEW INSTALLATION ONLY

PUBLIC RESPONSIBILITY
 PRIVATE RESPONSIBILITY

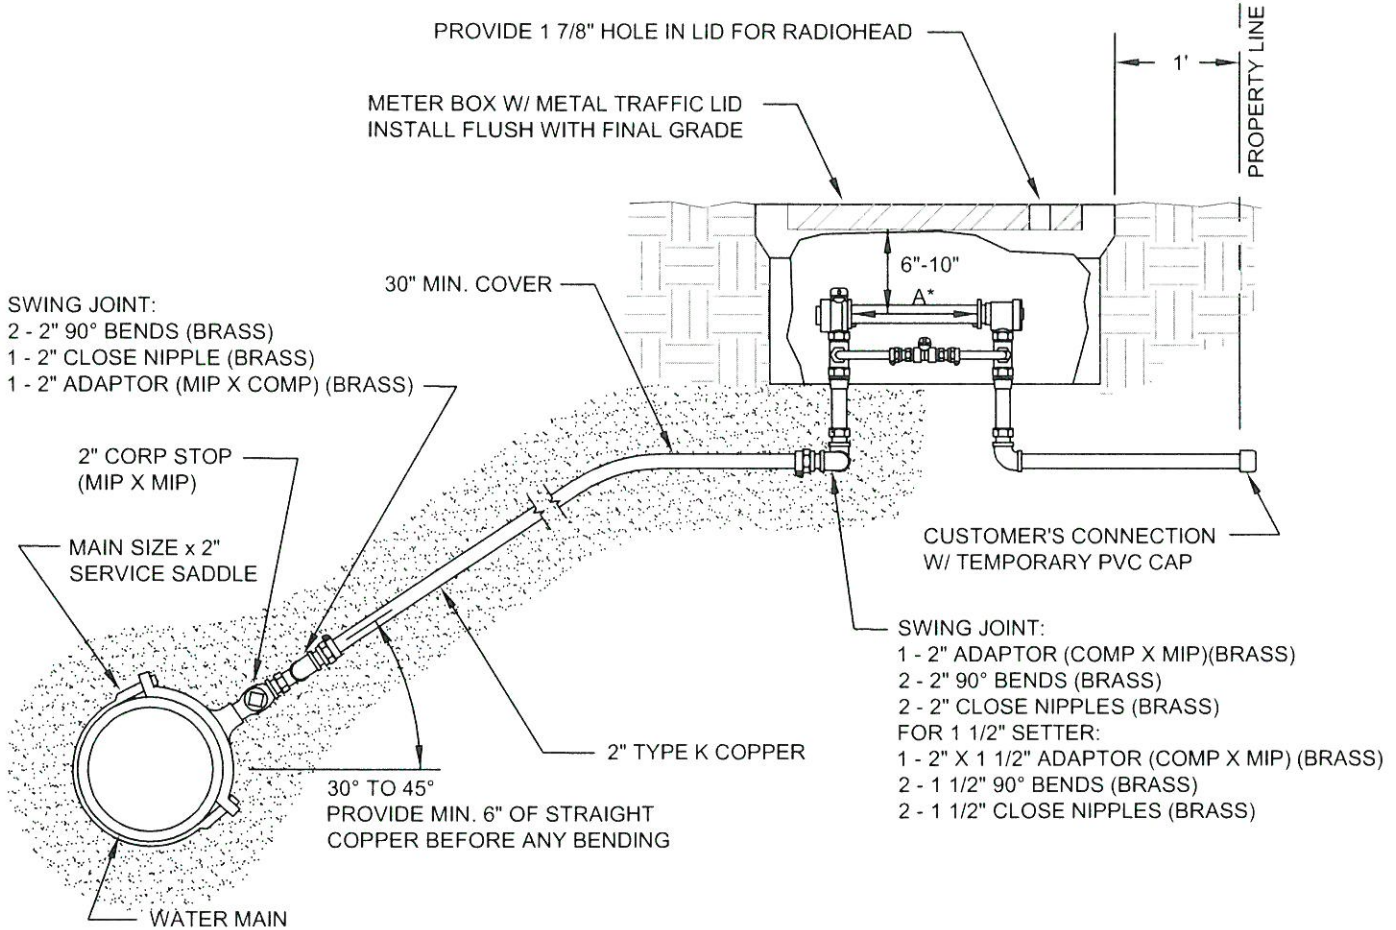

METER SIZE	A *
1 1/2"	13 1/4"
2"	17 1/4"

* DIMENSIONS INCLUDE GASKET WIDTHS.

NOTES:

- RETROFIT INSTALLATION MAY VARY.
- SEE APPROVED MATERIALS LIST.
- STREET ELLS ARE NOT ALLOWED.
- BED ALL SERVICE MATERIALS IN SAND (MIN. 6" AROUND ALL PIPING).
- INSTALL PVC TEMP. STRAIGHT PIPE IN SETTER TO SECURE ALIGNMENT DURING CONSTRUCTION.
- NO SPLICES ALLOWED UNLESS APPROVED BY DISTRICT.
- OWNER IS RESPONSIBLE TO INSTALL PRIVATE PRV TO PROTECT THEIR SYSTEM FROM HIGH PRESSURES.
- WHEN A SIDEWALK IS INSTALLED BEHIND METER, INSTALL COPPER TAIL PIECE TO PROPERTY SIDE OF SIDEWALK.

1 1/2-INCH AND 2-INCH WATER SERVICES WITH HIGH BY-PASS SETTER

NTS



APPROVAL DATE
10/21/2020

DRAWN
SED

CHECKED
DS

PLOTTING SCALE
NTS

FILE NAME
HWD STANDARD DETAIL 16

BD 10/28/20